

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 069 223 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
17.01.2001 Bulletin 2001/03

(51) Int Cl.7: D04H 13/00, A61F 13/15,
B32B 5/04

(21) Application number: 00305922.7

(22) Date of filing: 12.07.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 12.07.1999 JP 19815999
05.06.2000 JP 2000168303

(71) Applicant: UNI-CHARM CORPORATION
Kawanoe-shi Ehime-ken (JP)

(72) Inventors:
• Kobayashi, Toshio, C/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
• Tange, Satoru, C/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
• Yamaki, Koichi, C/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)


(74) Representative: Parry, Christopher Stephen
Saunders & Dolleymore,
9 Rickmansworth Road
Watford, Herts. WD18 0JU (GB)

(54) **Elastically stretchable composite sheet**

(57) In an elastically stretchable composite sheet including an elastic sheet and a fibrous assembly, a fibrous assembly 2 having an inelastic extensibility is bonded to at least one surface of an elastic sheet 3 at

intermittently arranged bond regions 4 to form a composite sheet 1. Component fibers 6 constituting the fibrous assembly 2 are long fibers continuously extending and describing curves between each pair of adjacent bond regions 4, 4.

FIG.1

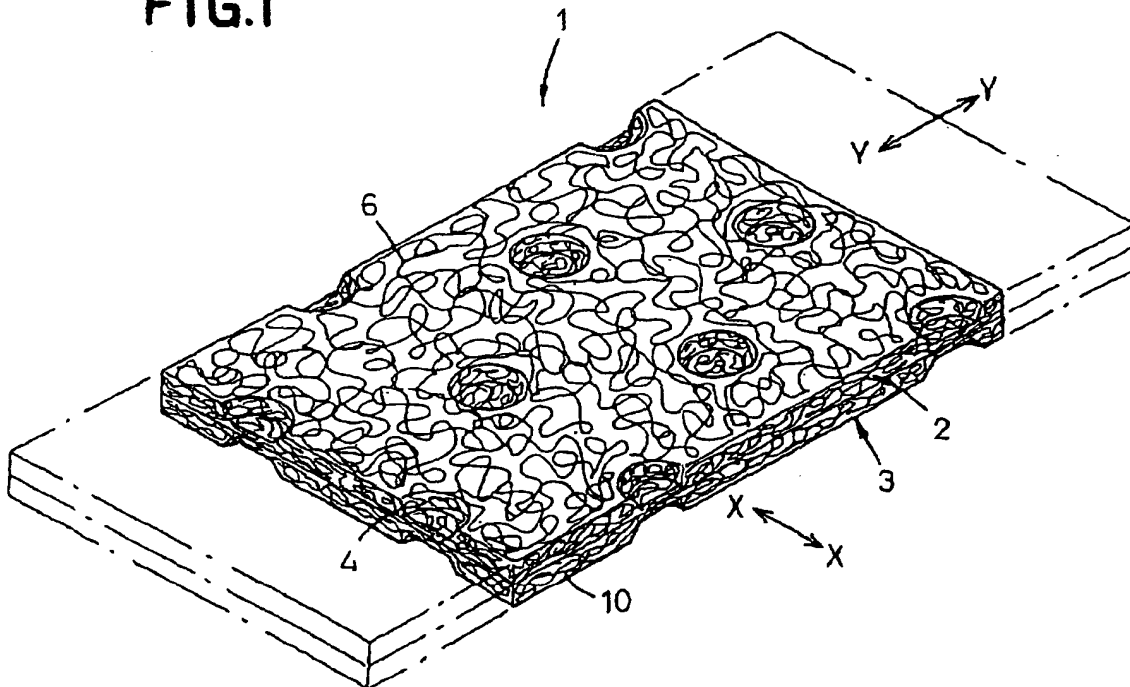

EP 1 069 223 A1

Description

[0001] This invention relates to an elastically stretchable composite sheet and more particularly to such a composite sheet comprising an elastic sheet and a sheet-like fibrous assembly.

[0002] It is well known to bond elastically stretchable nonwoven fabrics to an elastically stretchable sheets made of plastic elastomer or the like and thereby to convert a rubber-like touch intrinsic to the elastically stretchable sheet to a cloth-like touch. For example, in order to provide a liquid-impervious backsheet of a disposable diaper with an elastic stretchability, it is also well known to laminate an elastically stretchable nonwoven fabric on a liquid-impervious and elastically stretchable sheet.

[0003] In the composite sheet obtained by such a lamination, staple fibers each having a fiber length of about 50 mm have usually been used. Such composite sheet has had a problem that the staple fibers entangled together and forming the nonwoven fabric would be progressively disentangled one from another as the composite sheet is stretched. As a result, a proper structure of the nonwoven fabric as well as a proper structure of the composite sheet would be impaired and/or become fluffy unless entanglement spots of fibers and/or bond regions between the nonwoven fabric and the elastically stretchable sheet are distributed as densely as possible. However, the spots and/or the bond regions densely distributed will make it difficult to obtain a composite sheet having a high elastically stretchability.

[0004] An object of the invention is to eliminate or minimize factors impairing a stretchability of an elastically stretchable composite sheet and thereby to achieve its stretchability as high as possible.

[0005] According to this invention, there is provided an elastically stretchable composite sheet comprising an elastic sheet having a stretchability in two directions orthogonal to each other and a sheet-like fibrous assembly having an extensibility in the two direction bonded to at least one surface of the elastic sheet, wherein: the fibrous assembly has a inelastic extensibility, the elastic sheet and the fibrous assembly are bonded together at bond regions arranged intermittently in the two directions and component fibers constituting the fibrous assembly are long fibers continuously extending and describing curves between each pair of adjacent bond regions in which the long fibers are bonded to the elastic sheet.

[0006] The elastically stretchable composite sheet according to this invention enables the elastic sheet and the fibrous assembly to be reliably held in their condition bonded with each other even if the bond regions in which these elastic sheet and fibrous assembly are bonded with each other. This is for the reason that the extensible fibrous assembly laminated at least one surface of the elastic sheet comprises the continuous fibers. With the composite sheet obtained in this manner, its stretchability is not affected by the bond regions arranged at close

intervals as they have conventionally been the case. The composite sheet of this invention is stretchable but offers a cloth-like comfortable touch by the presence of the continuous fibers. Therefore, this composite sheet is suitable as the stock material for garments such as disposable diapers, sanitary napkins or disposable gowns.

Fig. 1 is a perspective view showing an elastically stretchable composite sheet according to this invention;

Fig. 2 is a view similar to Fig. 1 but showing one embodiment of this invention;

Fig. 3 is a view similar to Fig. 1 but showing another embodiment of this invention;

Fig. 4 is a diagram schematically illustrating an example of the process for making the composite sheet; and

Fig. 5 is a diagram similar to Fig. 4 but illustrating another example of the process for making the composite sheet.

[0007] Details of an elastically stretchable composite sheet according to this invention will be more fully understood from the description given hereunder with reference to the accompanying drawings.

[0008] An elastically stretchable composite sheet 1 shown by Fig. 1 in a perspective view comprises an upper layer 2 and a lower layer 3 bonded together at their bond regions 4. The composite sheet 1 is elastically stretchable and contractable at least in a direction represented by a double-headed arrow Y - Y rather than in a direction indicated by a double-headed arrow X - X being orthogonal to the direction Y - Y, as indicated by imaginary lines.

[0009] The upper layer 2 of the composite sheet 1 is inelastically stretchable at least in the direction Y - Y rather than in the direction X - X. This upper layer 2 is an assembly of long, preferably, continuous thermoplastic synthetic resin fibers 6 which continuously extend in a region defined around the bond regions 4. The fibers 6 are sealed with one another only at the bond regions 4 and neither sealed nor bonded together, i.e., separated one from another in the region defined around the bond regions 4. Between each pair of the adjacent bond regions, the continuous fibers 6 extend over the upper surface of the lower layer 3 along irregular curves. As the composite sheet 1 is stretched in the direction Y - Y and/or in the direction X - X, the curved continuous fibers 6 are reoriented to extend in the direction Y - Y and/or in the direction X - X and the upper layer 2 is inelastically stretched. Such continuous fibers 6 may be of inelastic synthetic resin such as polypropylene, ethylene-propylene random copolymer, polyester or polyethylene. Each of the continuous fibers 6 preferably have a diameter of 0.1 - 50 μ m.

[0010] The lower layer 3 of the composite sheet 1

comprises a sheet which is elastically stretchable in the direction Y - Y, preferably both in the direction Y - Y and in the direction X - X. This sheet has a stretch ratio of at least 200 %, preferably at least 400 % in the direction Y - Y and elastically contractile again to less than 1.3 times of its initial length after stretched by 100 %. Such sheet may be a fibrous assembly comprising continuous elastic fibers made of thermoplastic elastomer, a nonwoven fabric comprising the continuous fibers mechanically entangled or bonded with together or a film made of thermoplastic elastomer. The film, if it is used, may be moisture-permeable or moisture-impermeable. The sheet is exemplarily shown in the form of nonwoven fabric comprising continuous fibers 10.

[0011] The continuous fibers or film constituting the lower layer 3 may be made of block copolymerized polyester comprising hard and soft ingredients. The continuous fibers made of such polyester is able to cope with an environmental condition with its high moisture absorption as well as its high moisture permeability comparable to those of natural fibers. Therefore, the composite sheet 1 comprising such continuous fibers is suitable as stock material for garments such as disposable gowns. The film made of such polyester is also adequately moisture-permeable and the composite sheet 1 using the film is suitable as stock material for liquid-impervious backsheets of disposable body fluid absorbent articles such as disposable diapers or sanitary napkins. For such application of the film, its hard and soft ingredients are combined so that the film may have a moisture permeability of at least 1000 g/m²/24hrs. as measured in accordance with the prescription of JIS (Japanese Industrial Standards) Z 0208 and a water pressure resistance of at least 1 m, preferably at least 2 m as measured in accordance with the prescription of JIS L 1092. An example of the film useful to make the composite sheet 1 is a product of Toyobo Co., Ltd. put on the market under a trade name of PELPRENE P30B.

[0012] The hard ingredient is preferably polyester presenting a glass transition temperature of 50°C or higher which is obtained from dicarboxylic acid and diol. At least one of dicarboxylic acid and diol preferably includes an aromatic ring. The dicarboxylic acid includes aromatic dicarboxylic acid such as phthalic acid, terephthalic acid, isophthalic acid, 2, 6-naphtalene dicarboxylic acid, 1, 5-naphtalene dicarboxylic acid, diphenyl-4, 4'-naphtalene dicarboxylic acid, 3, 3'-dimethyldiphenyl-4, 4'-dicarboxylic acid, 4, 4'-diphenylsulfonedicarboxylic acid, and 4, 4'-diphenoxyethanedicarboxylic acid; aliphatic dicarboxylic acid such as succinic acid, oxalic acid, adipic acid, sebacic acid and dodecane diacid; and alicyclic dicarboxylic acid such as 1, 4-cyclohexanedicarboxylic acid and decahydronaphtalene-2, 6-dicarboxylic acid.

[0013] The soft ingredient is preferably polyether, aliphatic polyester or copolymer of polyether and aliphatic polyester, which presents a glass transition temperature lower than 20°C. Polyether includes poly-

ethylene glycol, poly (ethylene/propylene) block polyglycol, polytetramethylene glycol and polyhexamethylene glycol; and the aliphatic polyester includes polyethylene adipate, polybutylene adipate and polycaprolactone.

[0014] These upper and lower layers 2, 3 may be bonded together at the bond regions 4 by heating them together under a pressure or by ultrasonic-sealing them with each other. If a technique of mechanical entanglement is also useful to bond the continuous fiber 6 of the upper layer 2 with the construction of the lower layer 3, such mechanical entangling effect may be achieved by means of needle punching, high pressure columnar water streams or the like. Preferably, each of the bond regions 4 has an area of 0.03 - 10 mm² and a total area of the bond regions 4 occupies 1 - 50 % of the composite sheet's area.

[0015] Pulling the composite sheet 1, for example, in the direction Y - Y causes the lower layer 3 to be elastically stretched in the direction Y - Y. stretching of the lower layer 3, in turn, causes the curved continuous fibers 6 of the upper layer to be reoriented and thereby to be inelastically stretched in the direction Y - Y. Before the curved continuous fibers 6 are completely straightened, a force required to stretch the composite sheet 1 substantially corresponds to a force required to stretch the lower layer 3 alone. The upper layer 2 has little influence upon the force required to stretch the composite sheet 1 since no significant force is required for the upper layer 2 to reorient its continuous fibers 6. Further pulling the composite sheet 1 causes the curved continuous fibers 6 to be further reoriented and thereby to be straightened in the region extending between each pair of the adjacent bond regions 4. To stretch the composite sheet 1 further from such condition, a force is required, in addition to the force required to stretch the lower layer 3 alone, to stretch the straightened continuous fibers 6. The continuous fibers 6 do not prevent the lower layer 3 from being smoothly stretched also in the direction X - X so far as the continuous fibers 6 maintains their curves. The continuous fibers 6 preferably describe loops in the plane of the composite sheet 1 to obtain the isotropic composite sheet 1 which is elastically stretched equally in the direction Y - Y and in the direction X - X at least by 20 %.

[0016] Fig. 2 is a view similar to Fig. 1 but showing one preferred embodiment of this invention. The composite sheet 1 according to this alternative embodiment, the lower layer 3 is formed by film 20 having an elastic stretchability in the direction Y - Y or both in the direction Y - Y and in the direction X - X. The upper layer 2 and the lower layer 3 are bonded with each other at the bond regions 4.

[0017] Fig. 3 also is a view similar to Fig. 1 but showing another preferred embodiment of this invention. In the case of this composite sheet 1, the lower layer 3 in the form of the film 20 is formed on its lower surface with a third layer 300 which is elastically or inelastically

stretchable similarly to the upper layer 2. These upper and lower layers 2, 3 and the third layer 300 are bonded together at the bond regions 4. The third layer 300 is an assembly of continuous fibers 310 made of thermoplastic synthetic resin and the fibers 310 are preferably bonded together at the bond regions 4 but neither sealed nor bonded together between each pair of the adjacent bond regions 4. Between each pair of the adjacent bond regions 4, the continuous fibers 310 extend on the lower surface of the lower layer 3 along curves, preferably along loops in the plane of the composite sheet 1. As the composite sheet 1 is stretched, the third layer 300 is also inelastically stretched in the same manner as the upper layer 2. The continuous fibers 310 may be of the same material as the continuous fibers 6.

[0018] According to this invention, it is also possible to obtain the three-layered sheet as shown in Fig. 3 from the composite sheet 1 of Fig. 1. For example, the lower layer 3 of the composite sheet 1 of Fig. 1 is formed on its lower surface with the third layer 300 which is, in turn, bonded to the lower layer 3 at the bond regions 4.

[0019] Fig. 4 is a diagram schematically illustrating an example of the process for making the composite sheet. An endless belt 30 travels from the left hand toward the right hand as viewed in the diagram. On the left hand, there is provided a first melt blown fiber molder 31 above the belt 30 below which there is provided a suction mechanism 31A. The first molder 31 includes a plurality of nozzles arranged transversely of the belt 30 and adapted to discharge first melt blown continuous fibers 35 of non-stretchable thermoplastic synthetic resin. The continuous fibers 35 are accumulated on the belt 30 along irregular curves to form a first web 41. For the first web 41, a discharge condition of the first molder 31 and a travelling condition of the belt 30 are selected so that the continuous fibers 35 stacked one upon another in the first web 41 may be prevented from being bonded together or, even if sealed together, these sealed continuous fibers 35 may be easily separated one from another on the subsequent step. The first continuous fibers 35 have a breaking extension of at least 70 %.

[0020] On the right side of the first molder 31, there are provided a second melt blown fiber molder 32 and a suction mechanism 32A. The second molder 32 also includes a plurality of nozzles arranged transversely of the belt 30 and adapted to discharge second melt blown continuous fibers 40 of elastically stretchable thermoplastic synthetic resin. The second melt blown continuous fibers 40 are accumulated on the first web 31 along irregular curves to form a second web 42. A discharge condition of the second molder 32 is selected so that these second continuous fibers 40 stacked one upon another may be sealed together and thereby form a sheet having an elastic stretchability in the travelling direction of the belt 30, preferably in the travelling direction as well as in the direction being orthogonal thereto. Such second continuous fibers 40 have a breaking extension higher than that of the first continuous fibers 35.

[0021] The first and second webs 41, 42 placed upon each other are now fed together to vertically paired embossing rolls 34, 34. The webs 41, 42 are thereby heated under a pressure at the bond regions arranged intermittently at least in the longitudinal direction corresponding to the direction in which these webs 41, 42 are fed rather than in the direction orthogonal to the longitudinal direction. In this manner, the webs 41, 42 are bonded together to form a first composite web 43.

[0022] The first composite web 43 travels through first, second and third pairs of stretching rolls 36, 37, 38. The first and third pairs of rolls 36, 38 rotate at the same speed but this speed is lower than a revolution speed of the second pair of rolls 37. A difference of the revolution speeds between the first pair of rolls 36 and the second pair of rolls 37 is adjusted so that the first composite web 43 may be stretched at a room temperature of 10 - 60 °C, preferably at a room temperature of 15 - 40 °C by a desired stretch ratio. After stretched, the first composite web 43 elastically contracts to its initial length between the second and third pairs of rolls 37, 38 to form a second composite web 44.

[0023] On the step of stretching the first composite web 43, the first continuous fibers 35 are longitudinally stretched diameter-reduced under a plastic deformation within its critical breaking extension between each pair of the adjacent bond regions in which the first and second webs 41, 42 have been bonded together. The second web 42 comprising the second continuous fibers 37 are elastically stretched within its critical elasticity between each pair of the adjacent bond regions. On the step of stretching the first composite web 43, except the bond regions in which the two webs are bonded together by the pair of embossing rolls 34, it is desirable that any bonded or mechanically entangled spots possibly having been formed among the first continuous fibers 35 of the first web 41 can be substantially loosened or disentangled. It is also desirable that bonded spots possibly having been formed between the first continuous fibers 35 and the second web 42 can be practically eliminated. The first composite web 43 preferably has a stretch ratio of 50 - 300 %.

[0024] The second composite web 44 is taken up in the form of a roll and subsequently is cut into a desired dimension to obtain the individual composite sheet 1. The first and second webs 41, 42 in the second composite web 44 correspond to the upper and lower layers 2, 3 in the composite sheet 1 of Fig. 1, respectively. Portions of the second composite web 44 bonded by the pair of embossing rolls 34 correspond to the bond regions 4 of the composite sheet 1.

[0025] Both the first and second webs 41, 42 are formed by the continuous fibers and, even when the bond regions are arranged at relatively wide intervals, these two webs 41, 42 can be reliably held together. By arranging the bond regions at relatively wide intervals, a desired stretchability of the second composite web 44 and therefore of the composite sheet 1 can be substan-

tially ensured.

[0026] When the second composite web 44, therefore the composite sheet 1 obtained in this manner is used as stock material for disposable garments such as disposable diapers or disposable gowns used in a medical site, it is not apprehended that a poor slidability peculiar to rubber-based material might stimulate the wearer's skin even if the second web contains the rubber-based stretchable material. The first continuous fibers 35 are stretched and thereby diameter-reduced, so these continuous fibers 35 correspondingly become comfortably softer than immediately after they have been discharged from the mold. Except the bond regions, the first continuous fibers 35 of the second composite web 44 are bonded neither with themselves nor with the second web 42 and a relatively small force required to stretch the second web 42 alone is sufficient as an initial force required to stretch the second composite web 44. Accordingly, the easily stretchable soft sheet is formed by the second composite web 44 in spite of its two-layered construction. The process according to the embodiment illustrated in Fig. 4 allows the first and second webs 41, 42 of the second composite web 44 to maintain their respective basis weights immediately after they have been discharged from the respective molders 31, 32. Both the first and second webs 41, 42 are assemblies of continuous fibers and therefore the second composite web 44 obtained from these two webs 41, 42 are generally breathable. In addition, there is no apprehension that the fibers might become fluffy and staple fibers might fall off even if the second composite web 44 is repetitively stretched and contracted. Elasticity of the second composite web 44 practically prevents formation of wrinkles after the web 44 has been folded. Such property is advantageous to use the composite sheet 1 as the stock material for the medical disposable gown.

[0027] The steps of the process for making the composite sheet 1 illustrated by Fig. 4 may be modified in various manners. For example, it is possible to feed the second 42 onto the belt 30 before the first web 41 is fed onto the belt 30. It is also possible to use, in addition to the pair of embossing rolls 34, the other means such as needle punching or high pressure columnar water streams in order to join the first and second webs 41, 42. Alternatively, a third mold can be provided downstream of the second mold 32 in Fig. 4 so that third melt blown continuous fibers discharged from this third mold may form a third web similar to the first web 41 on the second web 42 and thereby form a three-layered composite sheet 1 comprising, in addition to the first and second webs 41, 42 and the third web. The first web 41 and this third web may be either identical to each other or different from each other in type or resin, fineness, and appearance inclusive of color.

[0028] Fig. 5 is a diagram similar to Fig. 4 but illustrating another preferred embodiment of the process for making the composite sheet 1 of Fig. 2. According to this embodiment, a film 52 made of thermoplastic elas-

tomer and having an elastic stretchability in the traveling direction of the belt 30 is fed as the second web 42 from the left hand of Fig. 5 and the first web 41 comprising the first continuous fibers 35 is fed onto the film 52.

5 The first and second webs 41, 42 travel to the pair of embossing rolls 34, 34 in the same manner as in Fig. 4, between which the webs 41, 42 are intermittently bonded together to form the first composite web 43. This first composite web 43 is further stretched by the first - third 10 pairs of rolls 36, 37, 38 and then contracted to form the second composite web 44. In the second composite web 44 having been formed with the bond regions 4 of Fig. 1 by bonding the first web 41 with the second web 42 in the form of the film 52, the first web 41 comprises 15 continuous fibers like the second composite web 44 in Fig. 4. With this arrangement, the area of the individual bond regions 4 can be dimensioned as small as in the order of 0.03 - 1 mm² and/or the total area of the bond regions 4 can be also dimensioned as small as in the order of 1 - 10 % of the area of the second composite web 44 without an apprehension that the first and second webs 41, 42 might be easily separated from each other. It should be understood that the area of the individual bond regions 4 may be selectively varied in a 20 range of 0.03 - 10 mm² and/or the total area of these bond regions 4 may be selectively varied in a range of 1 - 50 % of the area of the second composite web 44 without departing from the scope of this invention.

[0029] The steps illustrated by Fig. 5 can be modified so that the third melt blown fiber molder is used to feed the third continuous fibers onto the lower surface of the film 52 onto which the first continuous fibers 35 have been fed to obtain the composite sheet 1 of Fig. 3 having the film 52 sandwiched between two fibrous webs.

Claims

1. An elastically stretchable composite sheet comprising an elastic sheet having a stretchability in two directions orthogonal to each other and a sheet-like fibrous assembly having an extensibility in said two direction bonded to at least one surface of said elastic sheet, wherein:
said fibrous assembly has a inelastic extensibility, said elastic sheet and said fibrous assembly are bonded together at bond regions arranged intermittently in said two directions and component fibers constituting said fibrous assembly are long fibers continuously extending and describing curves between each pair of adjacent bond regions in which said long fiber is bonded to said elastic sheet.
2. The composite sheet according to Claim 1, wherein said component fibers are neither sealed nor bonded with one another in a region extending between each pair of adjacent said bond regions.

3. The composite sheet according to Claim 1, wherein said component fibers are independent one from another in said region extending between each pair of adjacent said bond regions. 5
4. The composite sheet according to claim 1, wherein said component fibers describe loops in said region extending between each pair of adjacent said bond regions. 10
5. The composite sheet according to Claim 1, wherein said component fibers are in the form of stretched yarns made of polypropylene or polyester.
6. The composite sheet according to claim 1, wherein each of said component fibers has a diameter of 0.1 - 50 μ m. 15
7. The composite sheet according to Claim 1, wherein said component fibers are continuous fibers. 20
8. The composite sheet according to Claim 1, wherein said fibrous assembly has a basis weight of 2 - 100 g/m². 25
9. The composite sheet according to Claim 1, wherein said elastic sheet is made of elastically stretchable film or elastically stretchable continuous fibers.
10. The composite sheet according to Claim 9, wherein said elastically stretchable film is moisture-permeable. 30
11. The composite sheet according to Claim 9, wherein said elastically stretchable film presents a moisture-permeability of at least 1000 g/m²/24 hrs. as measured according to the prescription of JIS Z 0208 and a water pressure resistance of at least 1 m as measured according to the prescription of JIS L 1092. 35
12. The composite sheet according to Claim 9, wherein said elastically stretchable film is made of block copolymerized polyester comprising hard and soft ingredients and said soft ingredient is polyether or copolymer of polyether. 40
13. The composite sheet according to Claim 9, wherein said elastically stretchable continuous fibers are made of block copolymerized polyester comprising hard and soft ingredients and said soft ingredient is polyether or copolymer of polyether. 45
14. The composite sheet according to Claim 1, wherein said composite sheet is elastically stretchable at least by 20 % in said two direction. 50

55

FIG.1

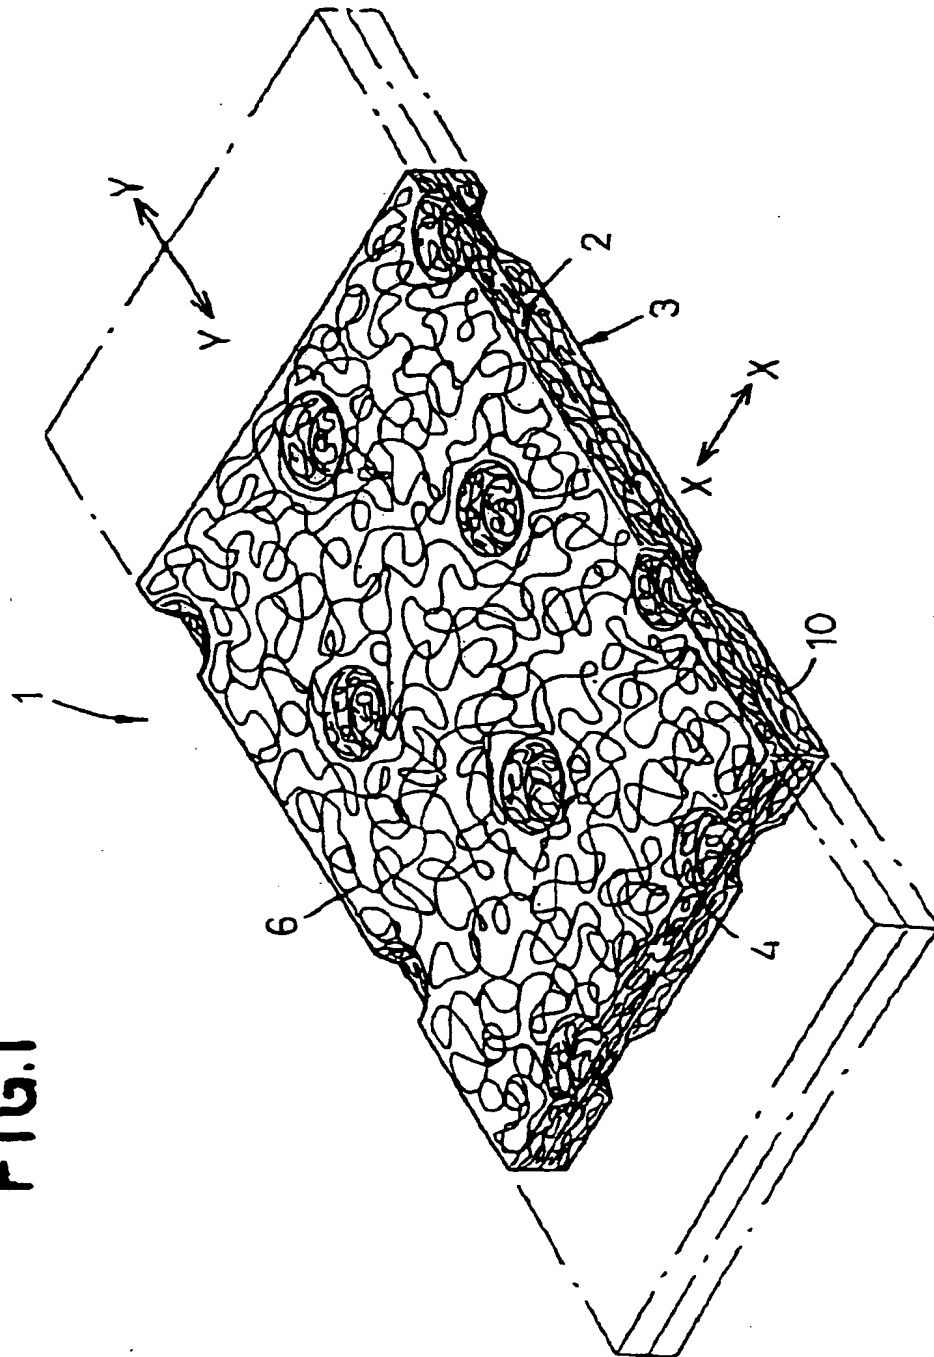
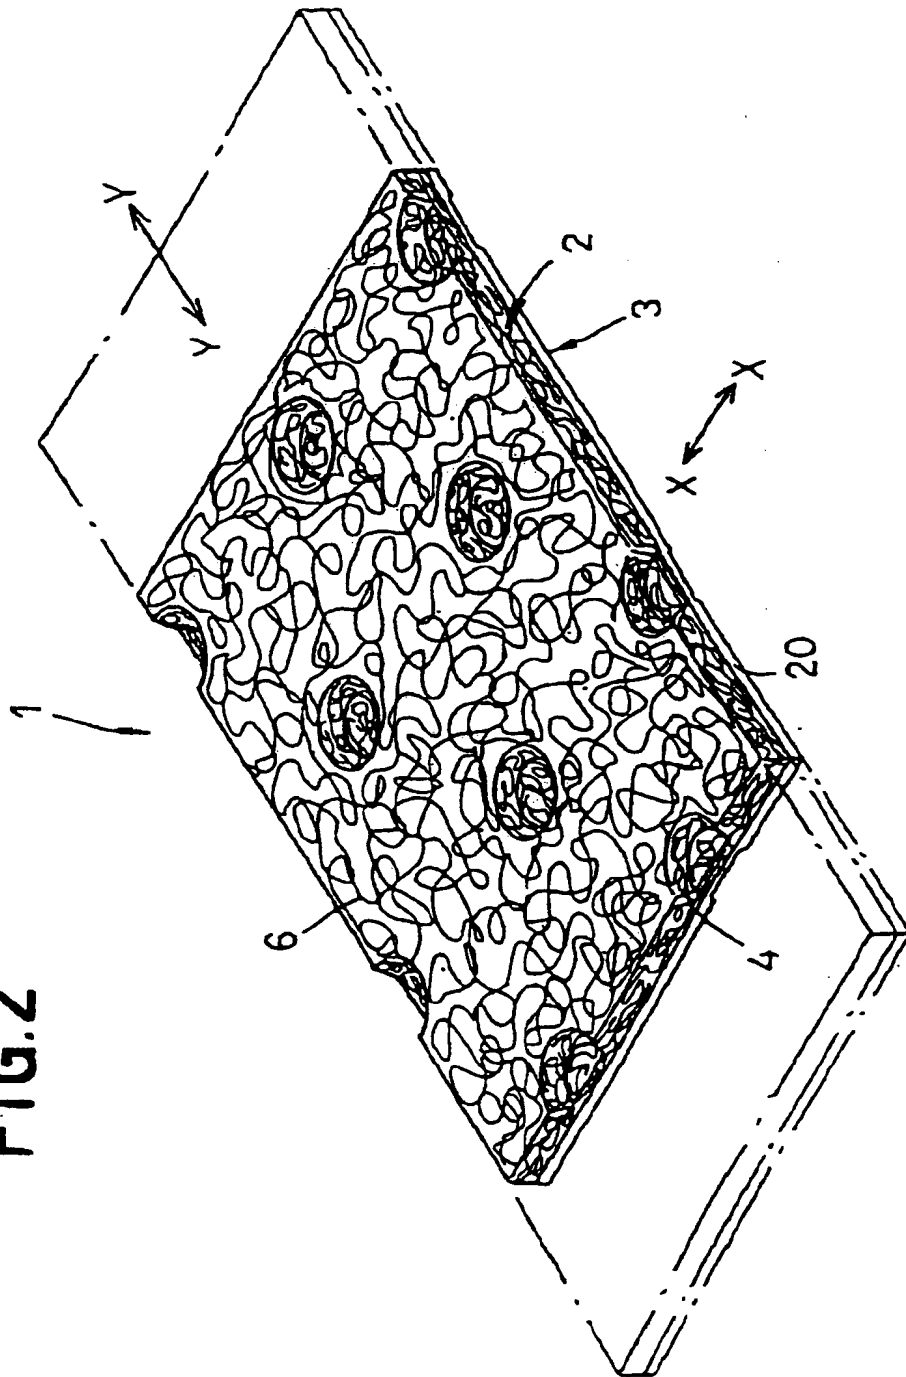


FIG.2



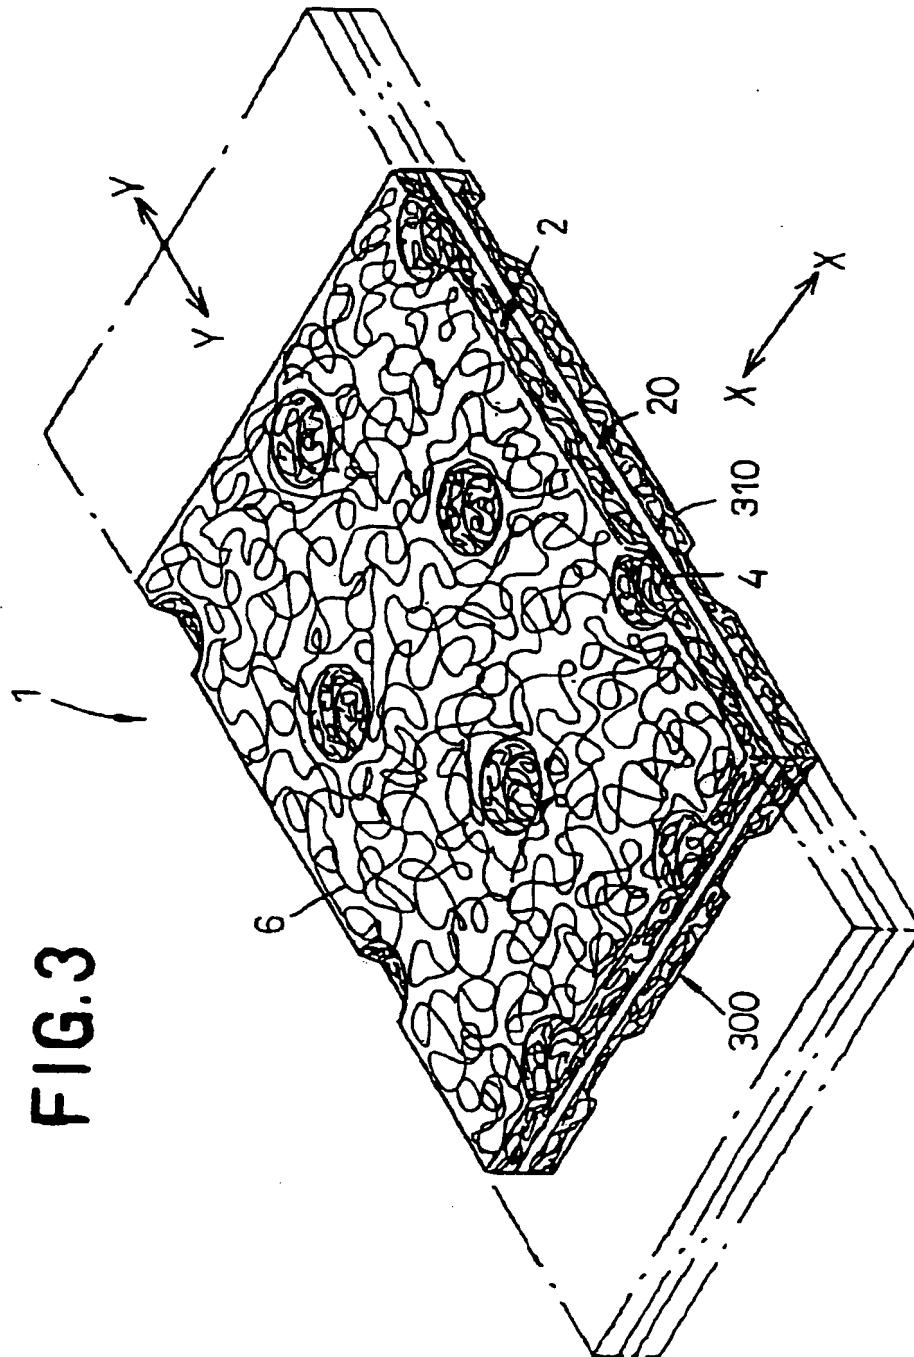


FIG. 4


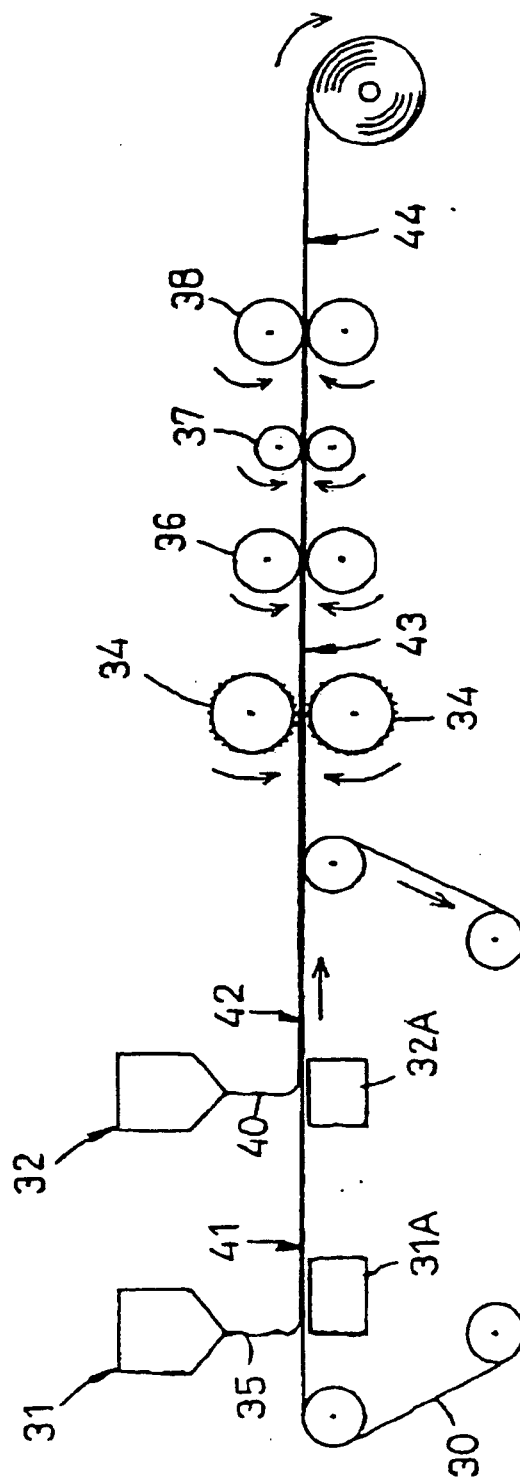


FIG. 5



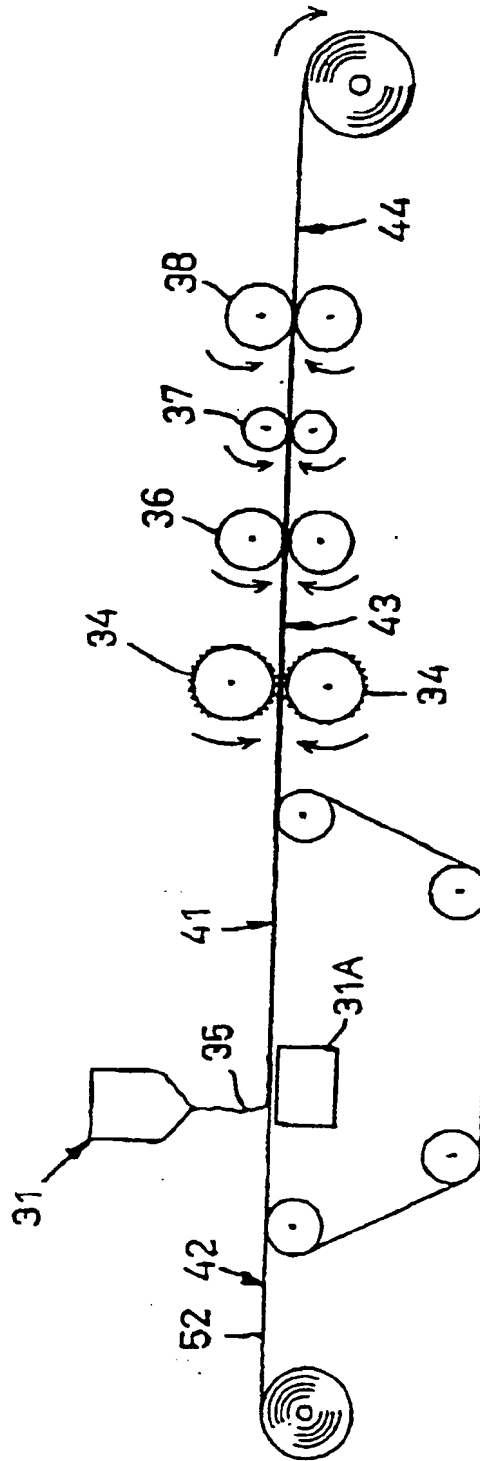

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 5922

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.7)
X	WO 96 38620 A (KIMBERLY CLARK CO) 5 December 1996 (1996-12-05) * page 8, line 7 - line 28 * * page 11, line 21 - page 12, line 14 * * examples 1-3 * -----	1-4, 7-10, 14	D04H13/00 A61F13/15 B32B5/04
			TECHNICAL FIELDS SEARCHED (Int. CL.7) D04H A61F B32B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 13 September 2000	Examiner Stinchcombe, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 5922

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-09-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9638620 A	05-12-1996	US 5681645 A	28-10-1997
		AU 5950096 A	18-12-1996
		CA 2220179 A	05-12-1996
<hr/>			

FIG.1

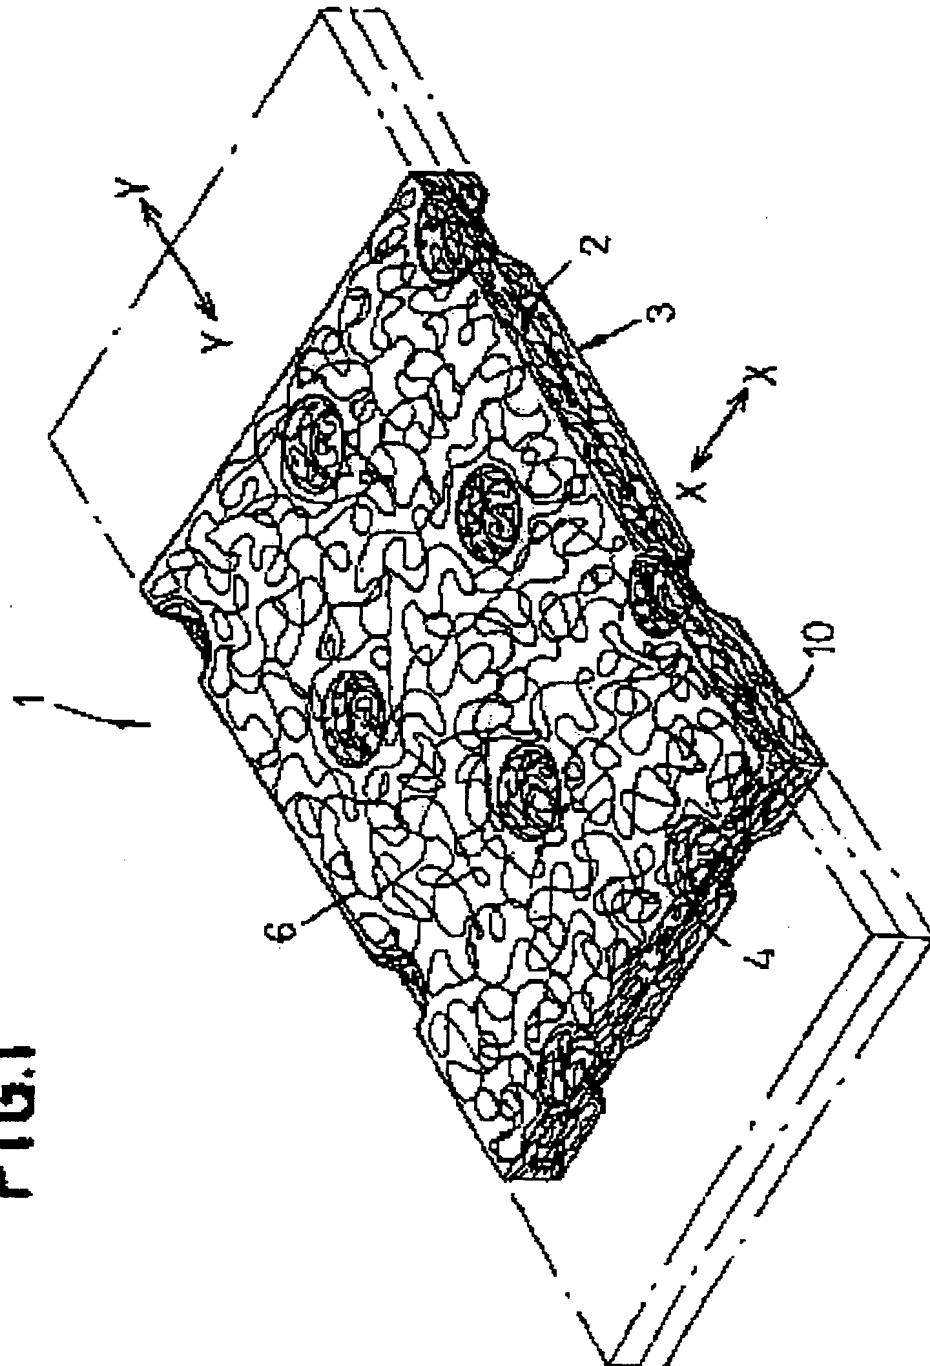
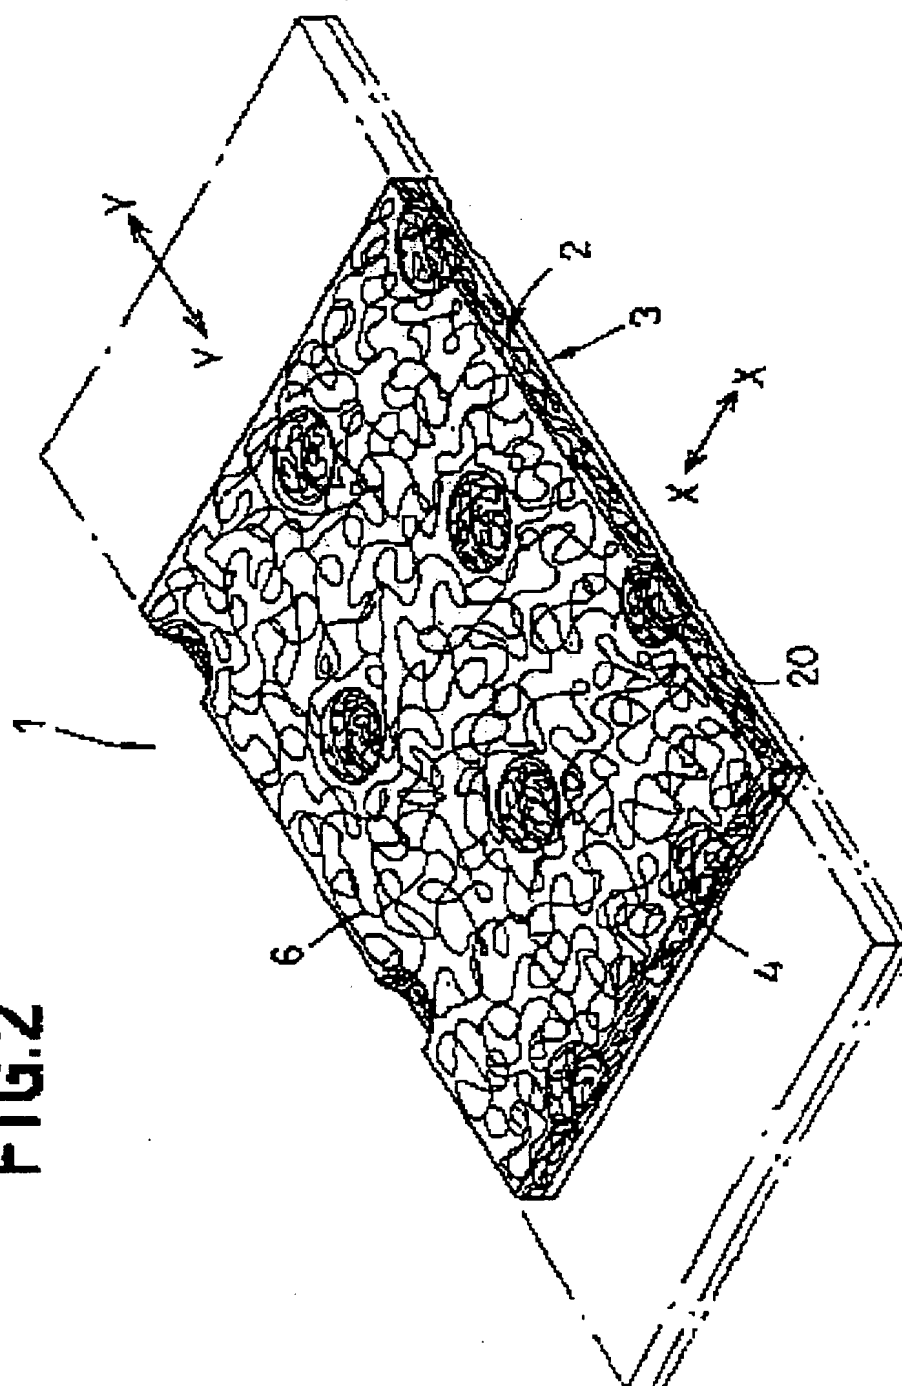


FIG.2



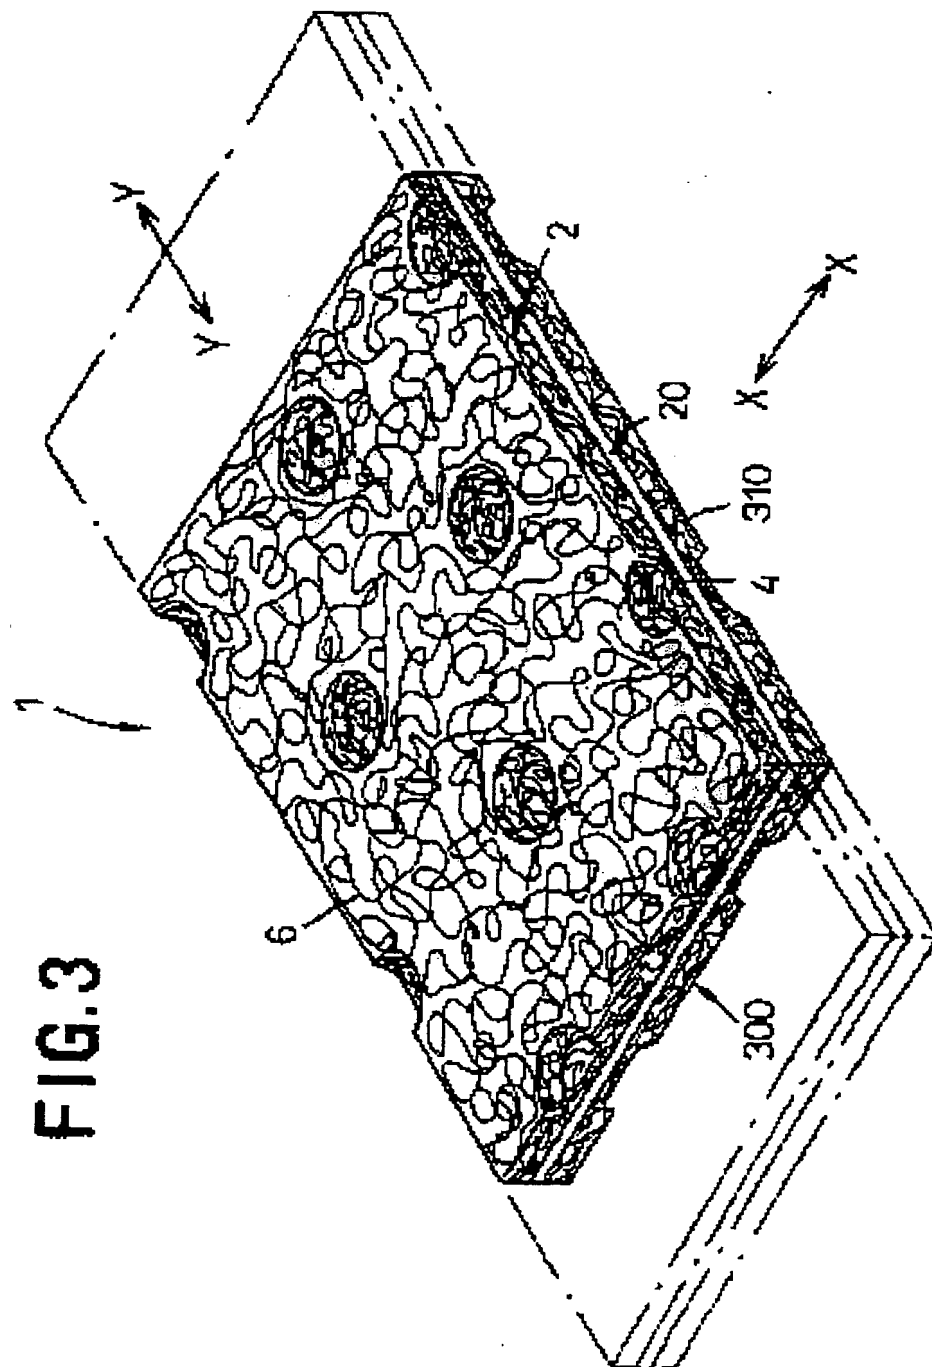


FIG. 5

